

# **DUAL PRESSURE & TEMPERATURE AMMONIA GAUGE**



As Shown: Model BR701w/Back Flange

# MODEL BR700

## **FEATURES:**

The Model BR700 Series from Blue Ribbon Corporation is a Dual Pressure and Temperature gauge, designed specifically for ammonia-based closed refrigeration systems.

## **SPECIFICATIONS:**

- Dial Sizes: 2.5" and 4"
- 304 Stainless Steel Case and Ring
- Polycarbonate Lens
- 316 Stainless Steel Tube and Socket
- Bottom and Back 1/4" NPT Connection
- Movement: 304 Stainless Steel
- Pointer: Aluminum
  - 701-702 Adjustable
  - 751-752 Fixed
- Ambient Process Temperature:
  - Dry: -40 °F to +150 °F
  - Liquid Filled: -4 °F to +150 °F
- Accuracy:
  - 2.5" Dial: 1.6% FS, (ASME B40.1, Grade A)
  - 4" Dial: 1% FS, (ASME B40.1, Grade 1A)
- Enclosure Rating: IP65

## **ORDERING GUIDE:**

#### **BAYONET BEZEL** (Removeable)

BOTTOM MOUNT						
Pressure Range	2.5" Dial	4" Dial				
30" 0-150 PSI	BR701D-254CF	BR701D-404CF				
30" 0-300 PSI	BR701D-254CH	BR701D-404CH				
BACK MOUNT						
Pressure Range	2.5" Dial	4" Dial				
30" 0-150 PSI	BR702D-254CF	BR702D-404CF				
30" 0-300 PSI	BR702D-254CH	BR702D-404CH				

#### **CRIMPED BEZEL (Non-Removeable)**

BOTTOM MOUNT						
Pressure Range	2.5" Dial	4" Dial				
30" 0-150 PSI	BR751D-254CF BR751D-404					
30" 0-300 PSI	BR751D-254CH	BR751D-404CH				
BACK MOUNT						
Pressure Range	2.5" Dial	4" Dial				
	2.0 5.0.	7 214				
30" 0-150 PSI	BR752D-254CF	BR752D-404CF				




Toll Free: +1.877.774.4751 Tel: +1.716.773.9300 Fax: +1.716.773.5019 Email: BRsales@blueribboncorp.com Web: www.blueribboncorp.com

# DUAL PRESSURE & TEMPERATURE AMMONIA GAUGE


#### **DIMENSIONAL DRAWING**

All dimensions are in inches (mm)



#### BR700 DUAL TEMP/PRESSURE AMMONIA GAUGE

DIAL SIZE	'A'	'B'	'C'	'D'
Ø2.50	2.675	1.16	1.00	1.22
Ø4.00	4.29	1.4	3.2	1.256

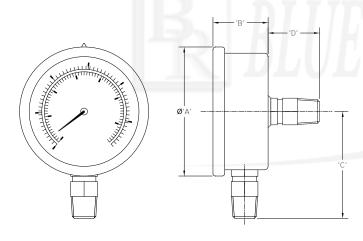

#### <u>BR751L</u> SS LIQUID FILLED GAUGE

DIAL SIZE	'A'	'B'	'C'	'D'
<b>Ø</b> 1.50	1.85	1.08	1.58	0.74
<b>Ø</b> 2.00 (1/8)	2.25	1.155	2.15	0.91
<b>Ø</b> 2.00 (1/4)	2.25	1.155	2.165	0.935
<b>Ø</b> 2.50	2.675	1.16	2.185	1.22
<b>Ø</b> 4.00 (1/4)	4.29	1.4	3.2	1.256
<b>Ø</b> 4.00 (1/2)	4.29	1.4	3.24	1.293

All specifications are for reference purposes only. In the interests of continuous product improvement, all specifications are subject to change without notice. Please contact Blue Ribbon Corporation for assistance with your application.



© 2015 Blue Ribbon Corp. | 2770 Long Rd, Grand Island, NY 14072 USA

Toll Free: +1.877.774.4751 Tel: +1.716.773.9300 Fax: +1.716.773.5019 Email: BRsales@blueribboncorp.com Web: www.blueribboncorp.com